



# OPERATING & ASSEMBLY INSTRUCTION

## powerCON® | Locking 3 pole Power Connector

### A. OPERATING INSTRUCTION

#### IMPORTANT SAFETY INSTRUCTION:


The powerCON system is certified as connector without breaking capacity according IEC 61984 / VDE 0627.

In this standard the term connector (without breaking capacity) refers to components which in normal use are not to be engaged or disengaged when under load or live.


#### Connector Combination & Keyways:

With the two non-interchangeable types of connectors (A type and B type) it is impossible to produce a short circuit. Mating connectors (combination) are identified by mechanical keyways and by color.


**A type (color coding blue)**  
**POWER IN**

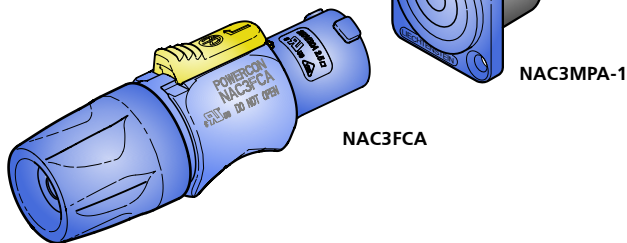

**B type (color coding gray)**  
**POWER OUT**

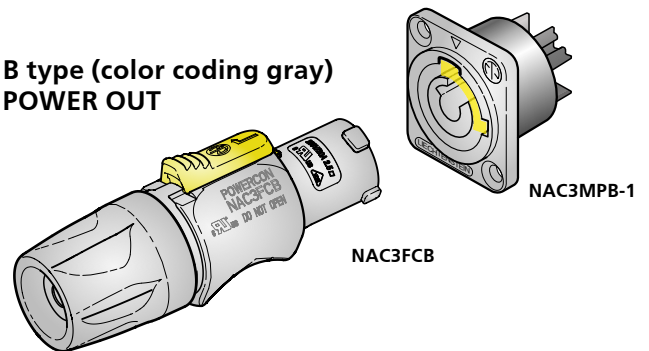


### B. ASSEMBLY INSTRUCTION

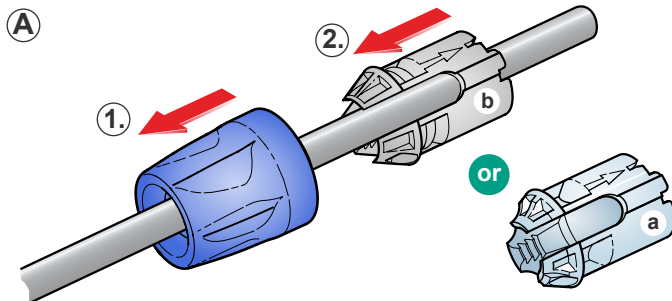


**A** Place the bushing (1) and the chuck (2) over the cable.

White chuck (a): 6.0 - 11.0 mm [0.236 - 0.433"]  
Black chuck (b): 9.5 - 15.0 mm [0.374 - 0.59"]  
VDE: 9.5 - 14.0 mm [0.374 - 0.551"]

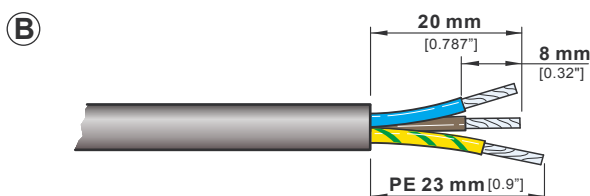


**B** Prepare the cable as shown.

Cable O.D.: 6.0 - 15.0 mm [0.236 - 0.59"]  
Wire size: 2.5 mm<sup>2</sup> (AWG 14)

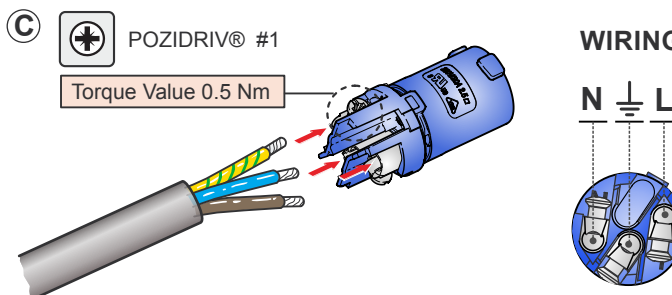

**C** Insert the wire into the terminals and fasten the clamping device with a POZIDRIV® #1, max. Torque 0.5 Nm (0.37 lb-ft).



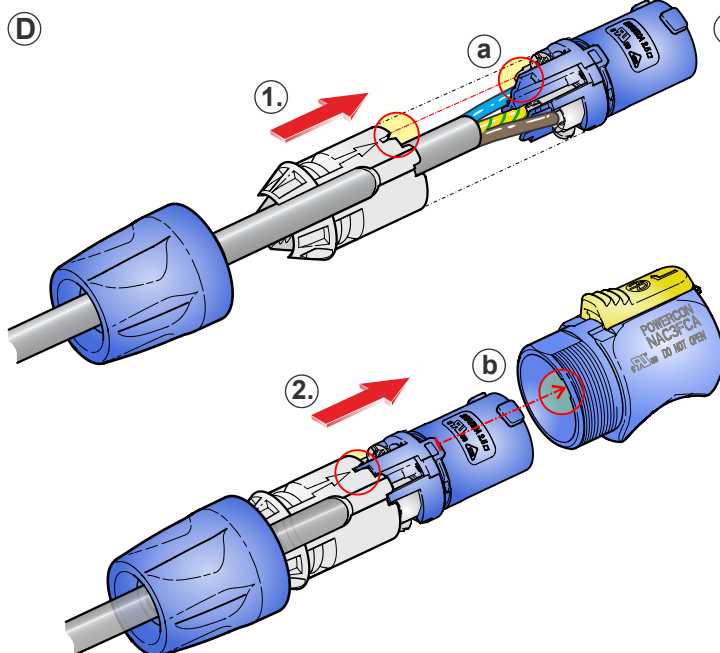


**D** Slide the insert and the chuck (1) into the housing (2).

**Important:**

- (a) Align the chuck by positioning the nose into the recess.
- (b) Pay attention to the guiding keyway!



**E**  Wrench size 7/8" (SW22)

Torque Value 2.5 Nm

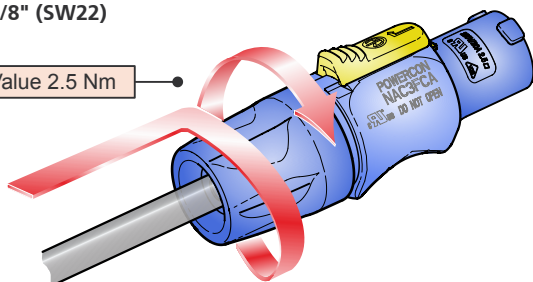

**E** Fasten bushing by means of a fork wrench 7/8" (SW 22), min. Torque 2.5 Nm (1.8 lb-ft).

**FINISHED powerCON**

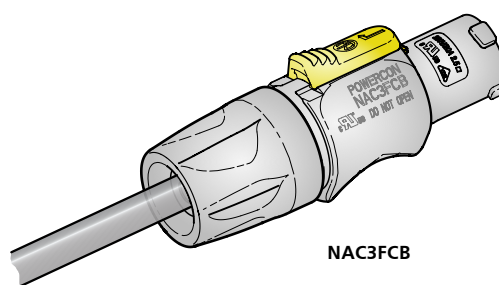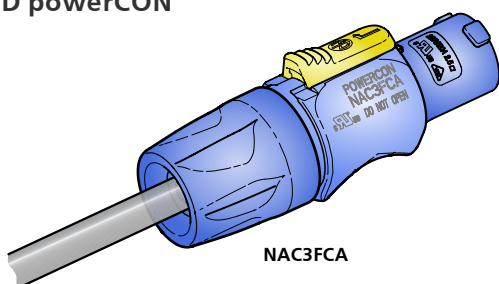

Find more details of powerCON on [www.neutrik.com](http://www.neutrik.com).

NEUTRIK AG  
NEUTRIK USA Inc.  
NEUTRIK (UK) Ltd.  
NEUTRIK Vertriebs GmbH

LI  
USA  
UK  
DE/NL/AT/DK

T: +423/237 24 24  
T: +1 704/972 3050  
T: +44 1983/811441  
T: +49 8131/280 890

F: +423/232 53 93  
F: +1 704/438 9202  
F: +44 1983/811 439  
F: +49 8131/280 830

NEUTRIK France  
NEUTRIK Tokyo Ltd.  
NEUTRIK Hong Kong Ltd.  
NEUTRIK India Pvt. Ltd.

FR  
JP  
HK  
IND

T: +33 1/4131 6750  
T: +81 3/3663 4733  
T: +852/2687 6055  
T: +91/982 05 43 424

F: +33 1/4131 0511  
F: +81 3/3663 4796  
F: +852/2687 6052  
F: +91/22 26163

Draft. Nr.: BDA 452 | Update: 31.08.2015 | Data subject to change without prior notice. ©2015 NEUTRIK®. ALL RIGHTS RESERVED. NEUTRIK® are registered trademark.